


ULTRA PRO™ SERIES FANS MODELS RB80C, RB110C

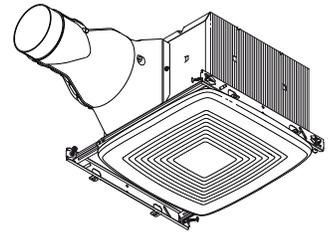

Quick Installation and Quiet Operation

FEATURES

UltraQuick™ Installation Technology

- Unique telescoping mounting frame fits through retrofit drywall opening to allow easy installation from the room side. No attic access needed!
- Captive mounting frame screws allow for easy new construction installation
- Mounting frame positioning tabs provide easy vertical positioning for new construction
- Works with any type of joist or truss system
- Duct connector and electrical knockout plate mount to outside or inside of housing, providing flexibility for new construction and retrofit applications
- Easy to insert and remove snap-in housing and blower

QStream™ Sound Technology

- Airflow-smoothing baffles reduce turbulence

QFlow™ Damper Technology

- When fan is on, damper position in the airstream is minimized to reduce static pressure and noise
- When fan is off, damper provides a tight seal to prevent back drafts

Blower

- Plug-in, permanently lubricated motor, engineered for continuous use

Housing

- Height allows for installation in 2" x 8" (nominal) construction


Grille

- Polymeric construction, innovative design

cU.L. Listed for use over bathtubs and showers when connected to a GFCI-protected branch circuit (ceiling mount only)

3 Year Warranty

DIMENSIONS (Inches)

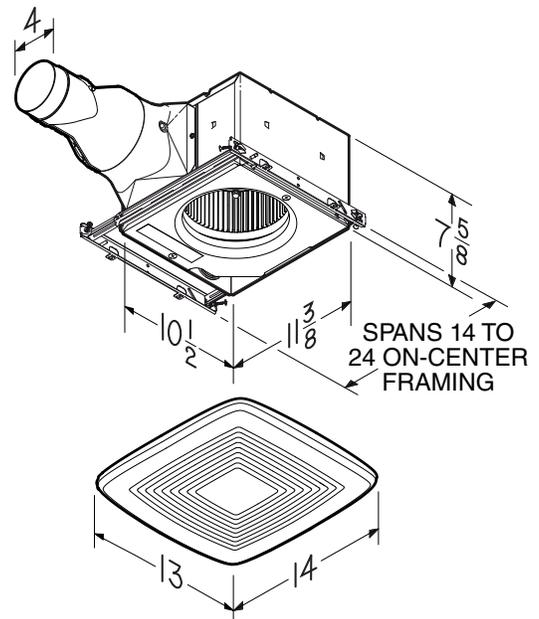

Broan-NuTone Canada; Mississauga, Ontario www.broan.ca 877-896-1119

| REFERENCE | QTY. | REMARKS | Project |
|-----------|------|---------|--------------|
| | | | Location |
| | | | Architect |
| | | | Engineer |
| | | | Contractor |
| | | | Submitted by |
| | | | Date |



PERFORMANCE SPECIFICATIONS

ULTRA PRO™ SERIES FANS

HVI PERFORMANCE

| Model | 0.1 Ps - Static Pressure (inH ₂ O) | | | | 0.25 Ps |
|--------|---|---------------|---------------|---------------------|---------------|
| | Airflow (CFM) | Sound (Sones) | Power (Watts) | Efficacy (CFM/Watt) | Airflow (CFM) |
| RB80C | 80 | < 0.3 | 27.4 | 2.9 | 60 |
| RB110C | 110 | 0.6 | 29.8 | 3.6 | 91 |




HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

ELECTRICAL & WEIGHT

| Model | Volts | Hz | Amps | Shipping Weight (lb) |
|--------|-------|----|------|----------------------|
| RB80C | 120 | 60 | 0.3 | 12.0 |
| RB110C | 120 | 60 | 0.3 | 12.0 |



Model RB80C

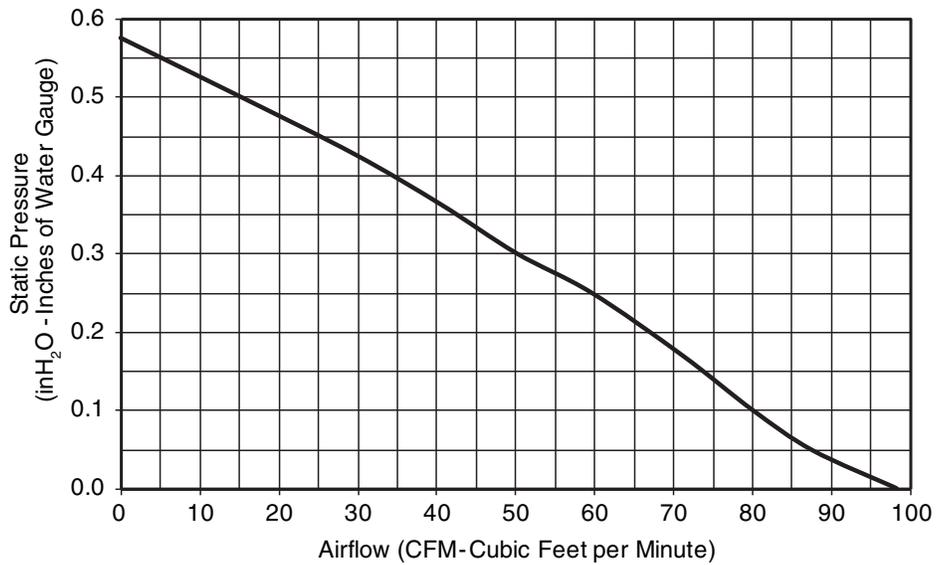

Model RB110C

